



INSTALLATION INSTRUCTIONS

Accessory

DOOR EDGE GUARDS

Application

2004 ODYSSEY

Publications No.

All 26006

Issue Date

AUG 2003

PARTS LIST

Right front door edge guard (upper)




Left front door edge guard (upper)



2 Front door edge guards (lower)



Hem sealant cutting tool



TOOLS AND SUPPLIES REQUIRED

Rubber mallet

Felt-tip pen


Touch-up paint

INSTALLATION

1. Clean and wax the area to be covered with a high-quality paste wax.
2. Identify each door edge guard by holding it up to the door and matching its contour with the door edge.


Installing the Front Door Edge Guards

3. Hold the right door edge guards against the inside edge of the door, and mark the sealant at the top and bottom of the ending points of the door edge guard.

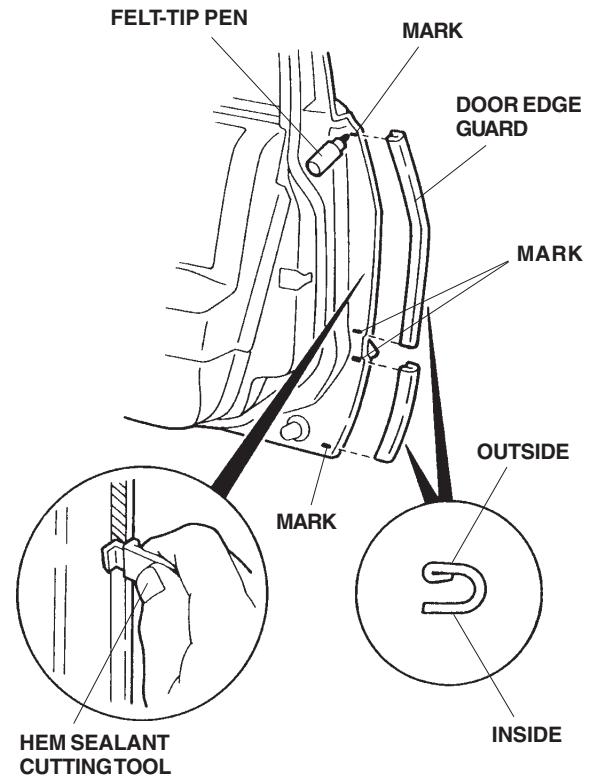

4. Position the hem sealant cutting tool against the door edge as shown, and trim the hem flange sealant from mark to mark, top and bottom.
5. Apply touch-up paint to the door, and let it dry.

6. Position the right door edge guard on the door edge, and tap it into position with a series of light taps using a rubber mallet.

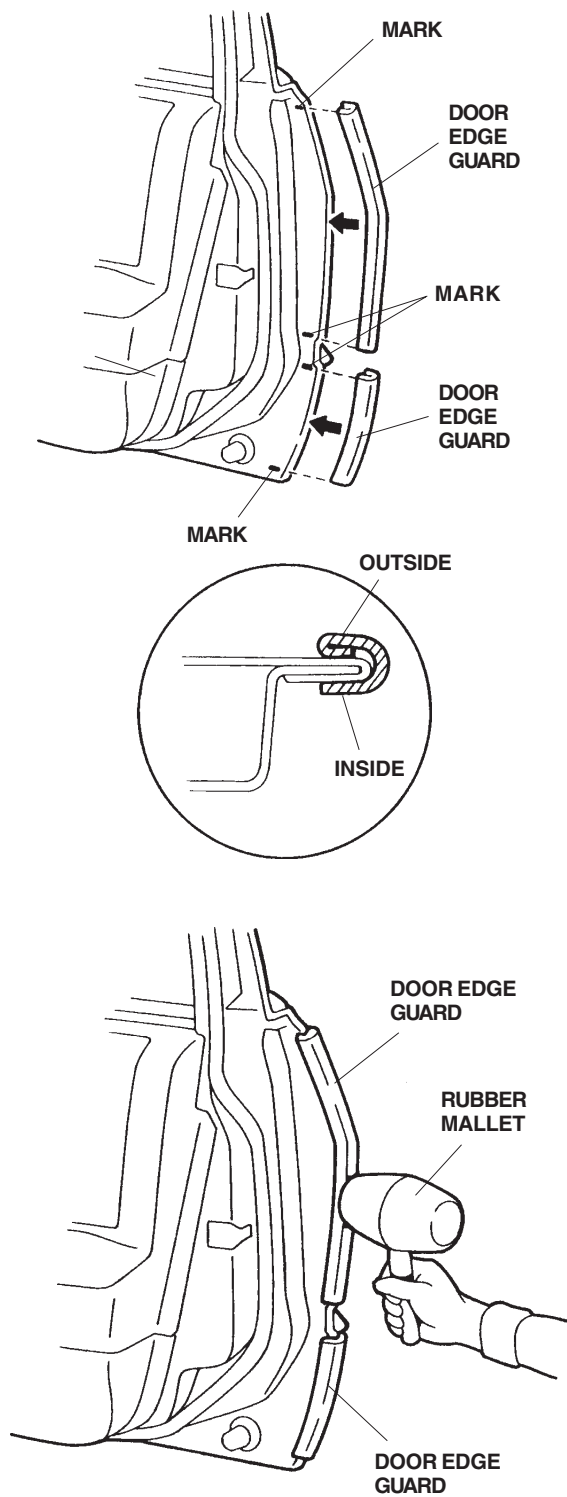

7. Repeat steps 3 through 6 to install the door edge guards on the left door.