

**INSTALLATION
INSTRUCTIONS**

Accessory

**LEATHER SHIFT KNOB (M/T)
P/N 08U92-SDA-100A**

Application

**2006 ACCORD
2- AND 4-DOOR**

Publications No.

All 30206

Issue Date

SEP 2005**PARTS LIST**


Leather shift knob

**TOOLS REQUIRED**


Long nose pliers

INSTALLATION


1. Squeeze the ring while you pull down on the shift boot. Remove the shift knob by turning it counterclockwise.

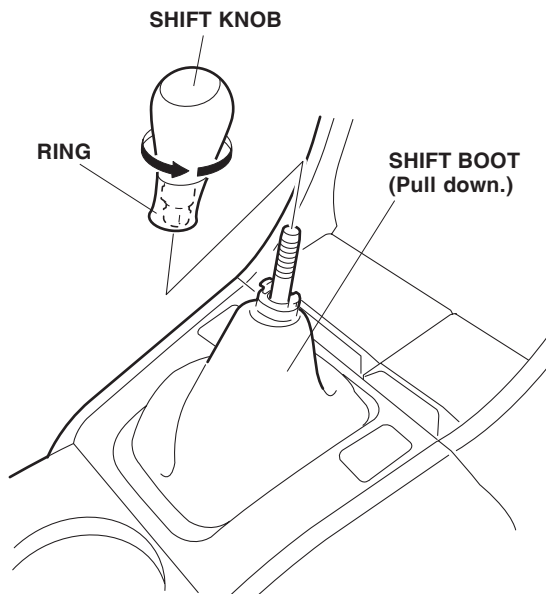


2. Remove the shift knob from the ring by squeezing the retaining tabs and pushing it up with long nose pliers.

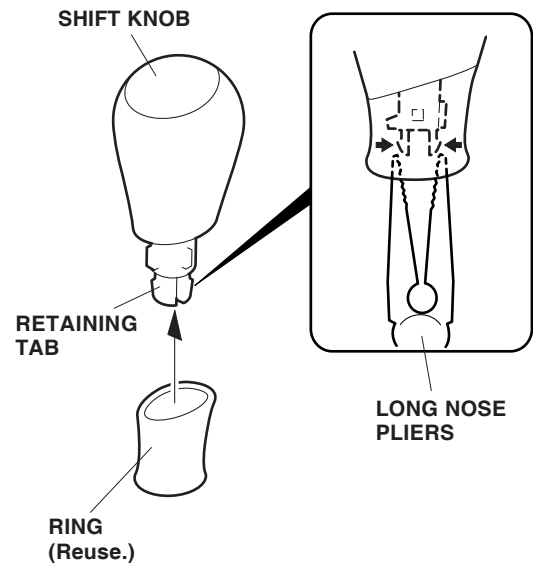

3. Transfer the ring to the leather shift knob.

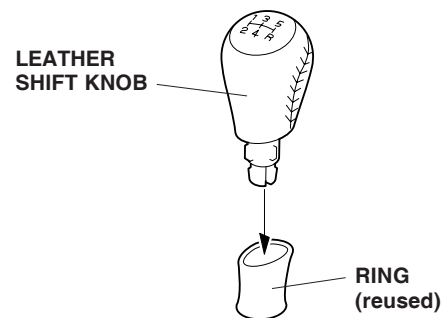

4. Install the leather shift knob on the shift lever by turning it in the clockwise direction.

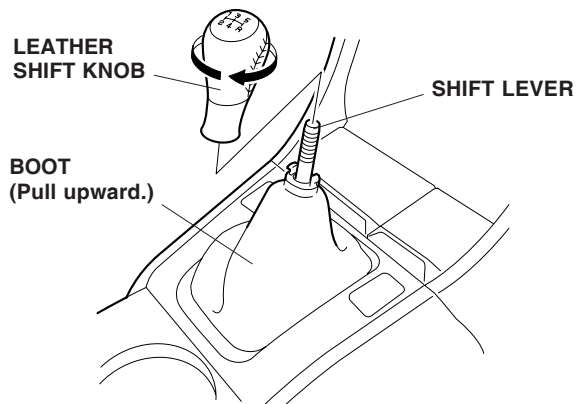

5. Pull the boot upward.

USE AND CARE

- Use a sponge or cloth and a solution of mild liquid dishwashing soap and water to clean the shift knob.
- Rinse the knob completely with water, then dry it with a shop towel.
- Never use organic solvents such as benzene, thinner, or gasoline to clean the shift knob.