



INSTALLATION INSTRUCTIONS


Accessory
M/T SPORT PEDALS
P/N 46545-XTK-900

Application
2010 FIT MUGEN


Publications No.
All 42196
Issue Date
JULY 2009

PARTS LIST


Mugen accelerator pedal cover




Rubber template




2 Mugen brake/clutch pedal covers




2 Brackets (clutch/brake)



Accelerator pedal top bracket



Accelerator pedal bottom bracket




2 Bolts (4 mm)




3 Rivet spacers



3 Rivets



3 mm Hex wrench



Alcohol wipe



TOOLS AND SUPPLIES REQUIRED

Drill

3.5 mm Drill bit

Eye protection (safety goggles, face shield, etc.)

Electrical tape

File

Felt-tip pen (white)

Pushpin


Rivet tool (MAR3900)

INSTALLATION


Customer Information: The information in this installation instruction is intended for use only by skilled technicians who have the proper tools, equipment, and training to correctly and safely add equipment to your vehicle. These procedures should not be attempted by "do-it-yourselfers."

Installing the Accelerator Pedal Cover


1. Remove the adhesive backing from the rubber template, and attach it to the top of accelerator pedal. Make sure the template is flush with the left and bottom edges of the accelerator pedal.

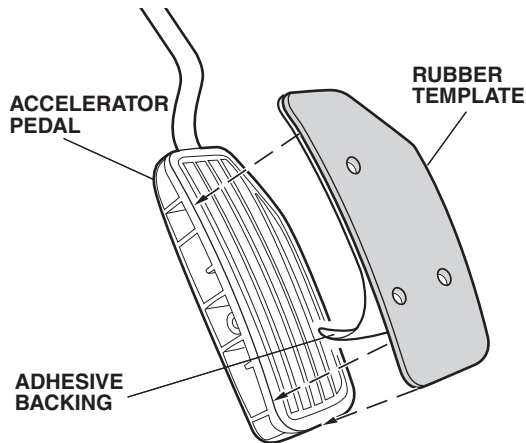


2. Using a pushpin, pierce the accelerator pedal at the center of each hole in the rubber template. Remove the rubber template.

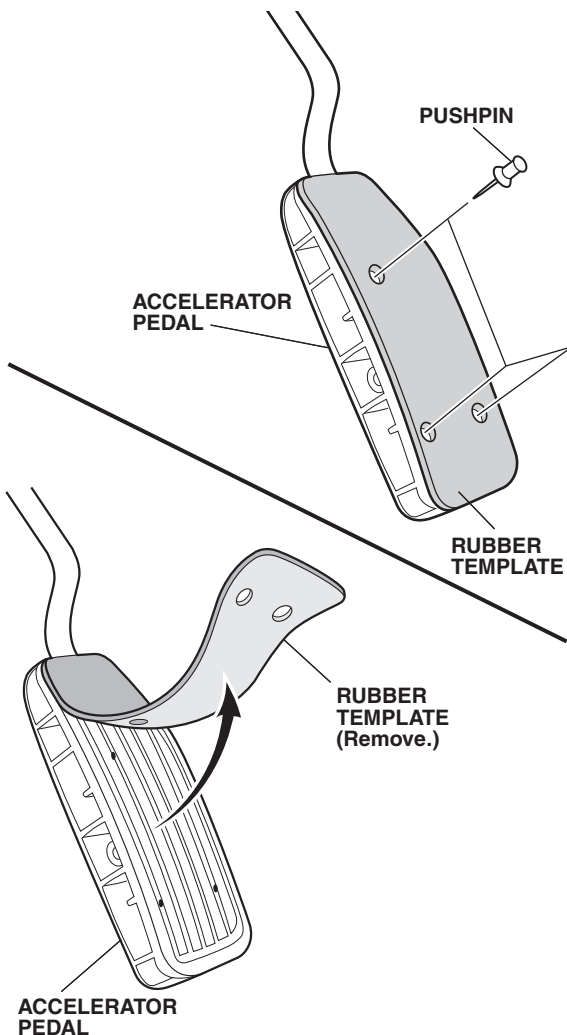


3. While wearing eye protection, drill the accelerator pedal at the pierced marks:
 - Wrap electrical tape around the drill bit 7 mm from the tip.
 - Place a block of wood under the accelerator pedal.
 - While holding the accelerator pedal against the wood block, drill each pierced mark with a 3.5 mm drill bit. Drill only through the first layer of the pedal. Do not drill completely through the pedal.
 - Using a file, remove the burrs from the edge of the holes.

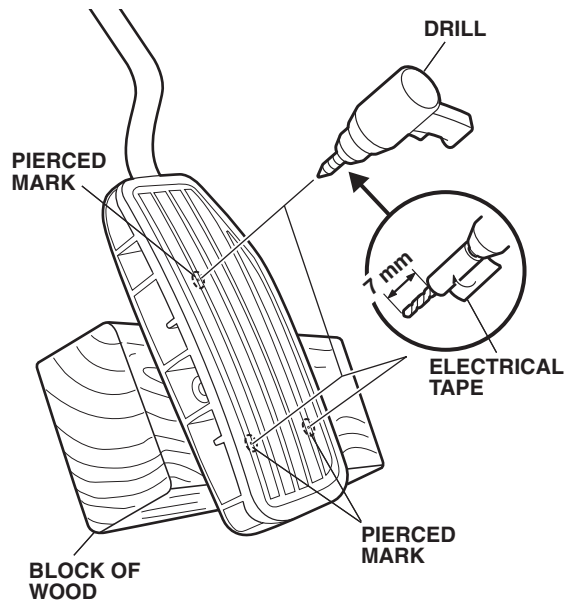


4. Insert the top and bottom brackets into the accelerator pedal in the direction shown.

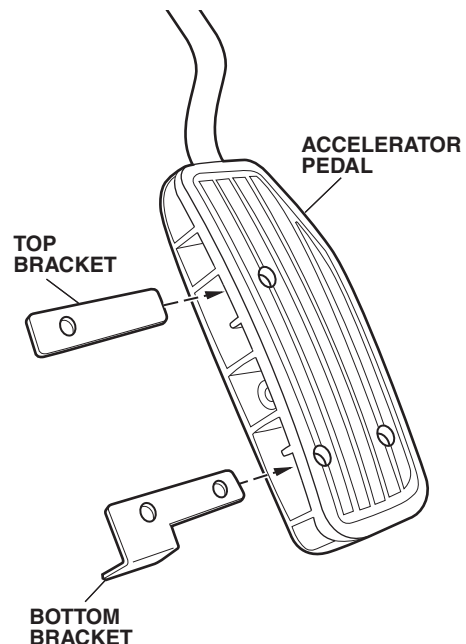

- Place the Mugen accelerator pedal cover over the accelerator pedal with the top edge and the side edge of the rubber spacer tight against the pedal. Insert the three rivets through the pedal, the brackets, and the pedal cover at the holes shown.

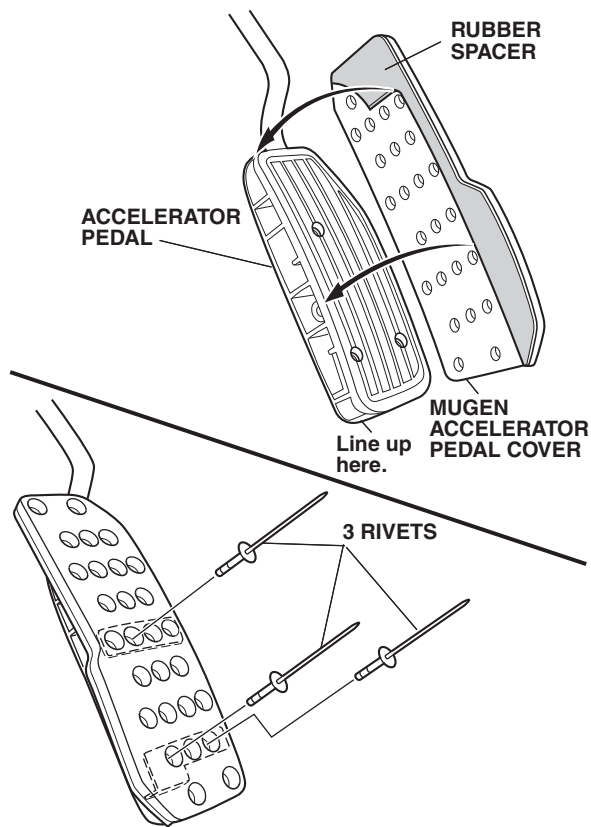


- Place one spacer on each rivet. Using the rivet tool, compress each rivet while holding the spacer tight against the pedal. Remove the spacers.

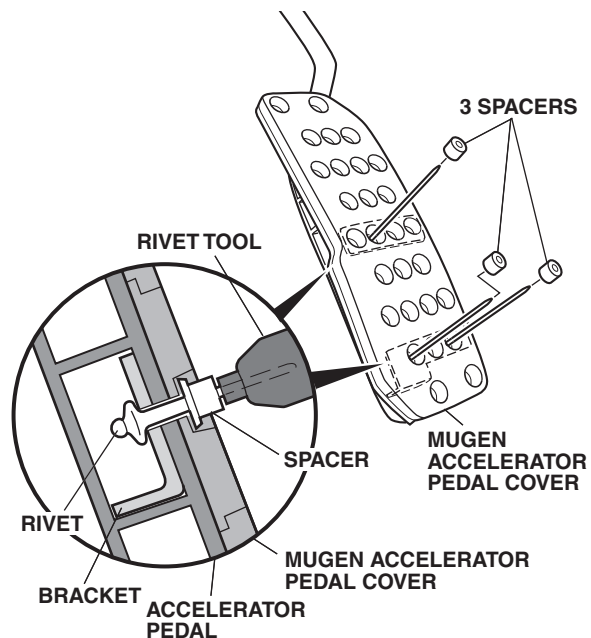


Installing the Brake/Clutch Pedal Cover

- Remove the vehicle brake pedal pad from the brake pedal.

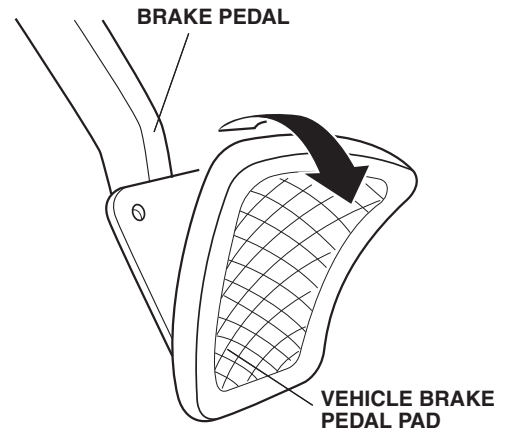


- Using isopropyl alcohol on a shop towel, clean the brake/clutch pedal. Allow the alcohol to dry.

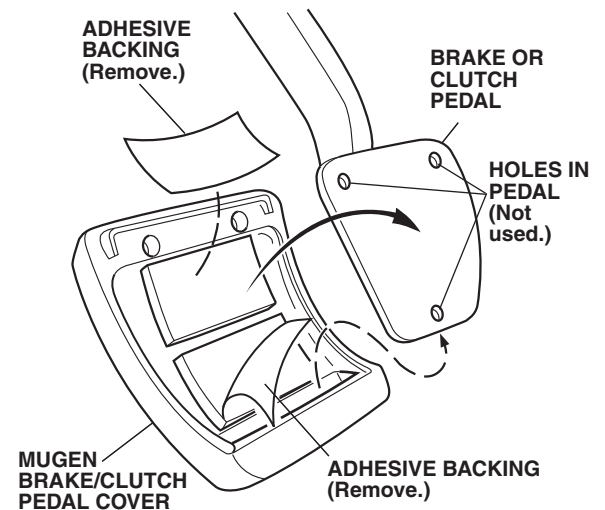

- Remove the adhesive backing from one Mugen brake/clutch pedal cover. Align the top of the pedal cover over the brake or clutch pedal, and press the pedal cover into the pedal in the position shown above.

NOTE: The holes in the brake and clutch pedals are not used to install the Mugen pedal cover.

10. Attach the pedal cover to the brake or clutch pedal using the bracket and two 4 mm bolts.

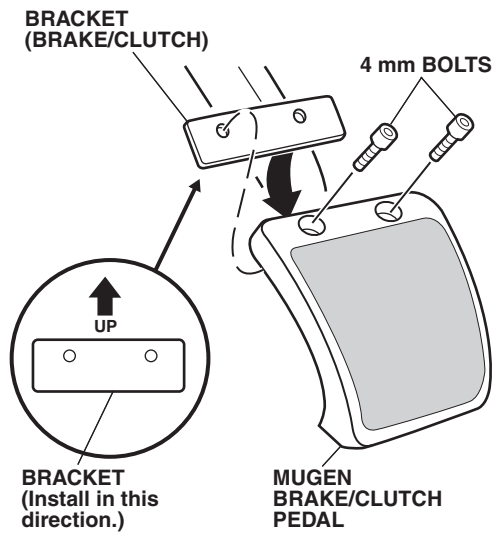

11. Repeat steps 7 thru 10 to install the other pedal cover.