




INSTALLATION INSTRUCTIONS


Accessory DOOR SILL TRIMS P/N 08E12-T2A-100A	Application 2013 ACCORD 4-DOOR	Publications No. All 13031
		Issue Date AUG 2012

PARTS LIST

Right front door sill trim



Left front door sill trim




Right rear door sill trim



Left rear door sill trim



2 Alcohol swabs



TOOLS AND SUPPLIES REQUIRED

Phillips screwdriver

Flat-tip screwdriver


Masking tape

Ruler

The following tool is available through the Honda Tool and Equipment Program. On the iN, click on: Service > Service Bay > Tool and Equipment Program, then enter the number under "Search". Or, call 888-424-6857.

- Trim Tool Set (T/N SOJATP2014)

Illustration of the Door Sill Trims on the Vehicle

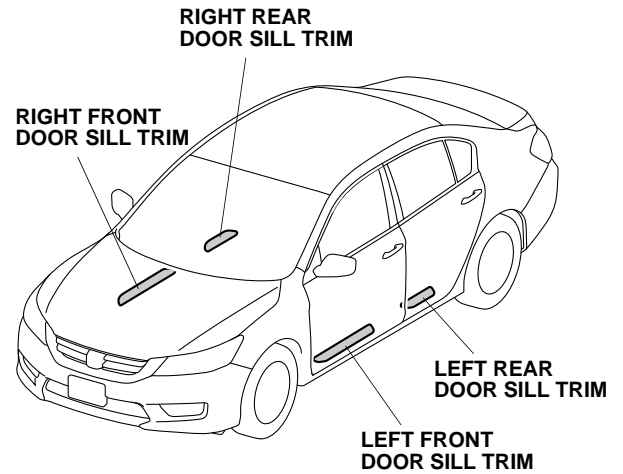


QB21301AB

INSTALLATION


Customer Information: The information in this installation instruction is intended for use only by skilled technicians who have the proper tools, equipment, and training to correctly and safely add equipment to your vehicle. These procedures should not be attempted by "do-it-yourselfers."

1. Remove the passenger's door sill trim (two retaining tabs and four clips).

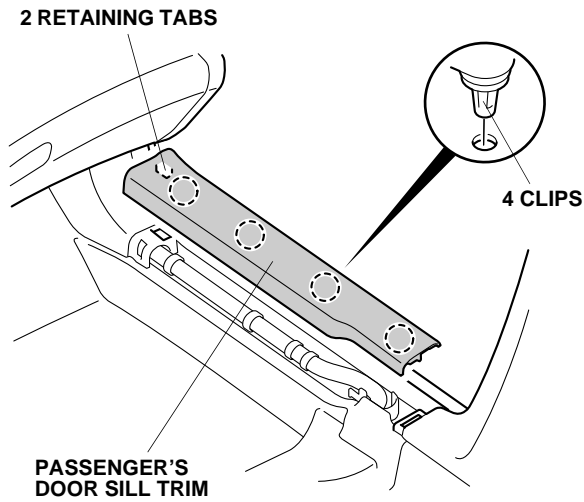


QB20801AB

4. Remove the driver's door sill trim (two retaining tabs and four clips).

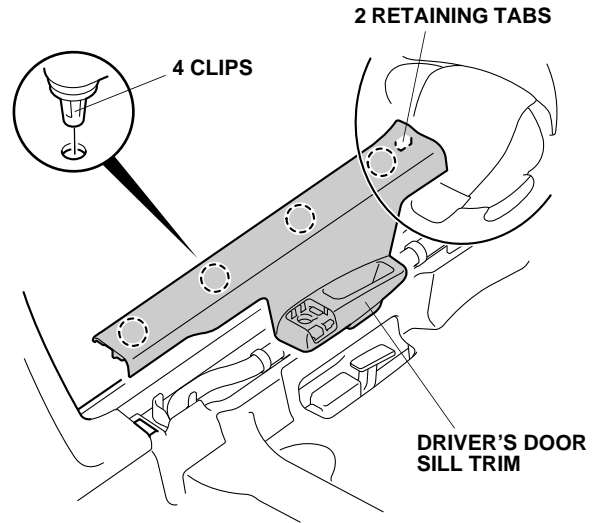


QB20804AB

2. Using the ignition key, unlock the trunk lid/fuel fill door opener, then remove the ignition key. Remove the key cover (six retaining tabs).

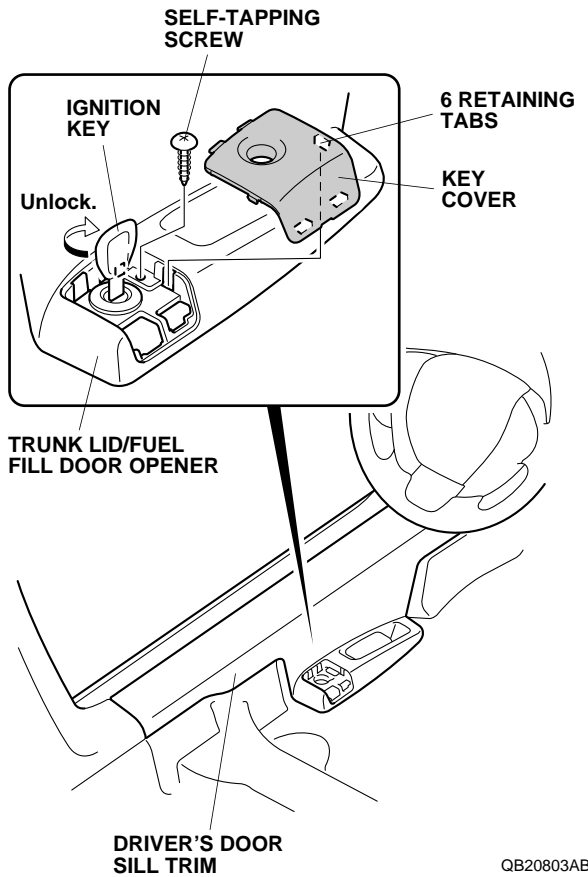

QB20803AB


5. Release the rear seat cushion (two hooks).

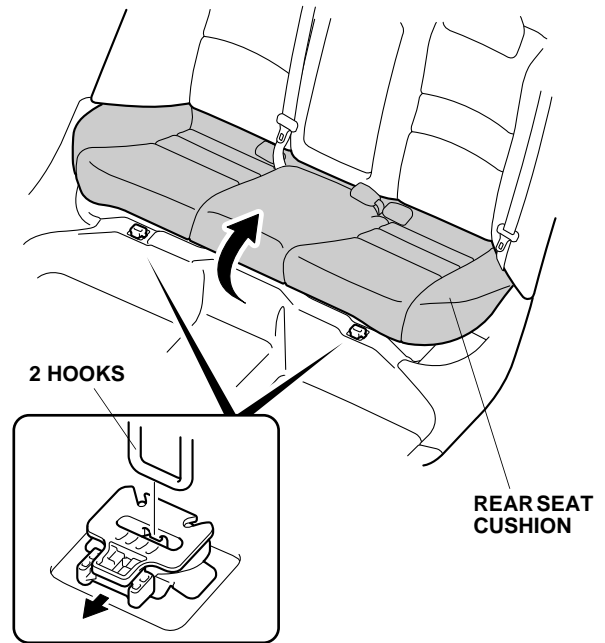

QB20806BB


3. Remove one self-tapping screw from the trunk lid/fuel fill door opener cover.

- Remove the left rear door sill trim (one retaining tab and four clips).

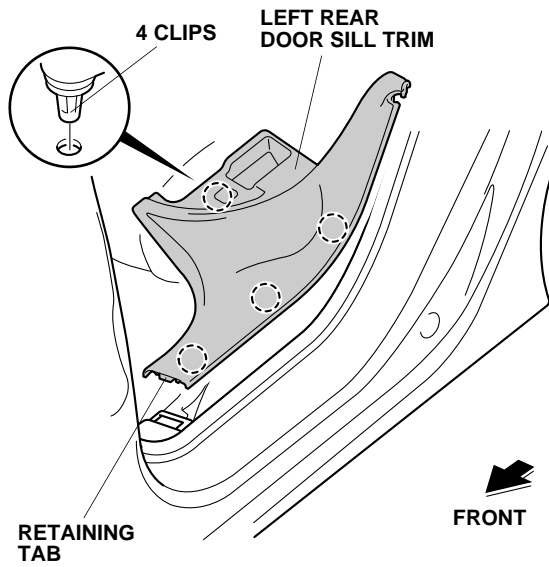

QB20807AB


- Repeat step 6 to remove the right rear door sill trim.
- Pull away the door opening seal.

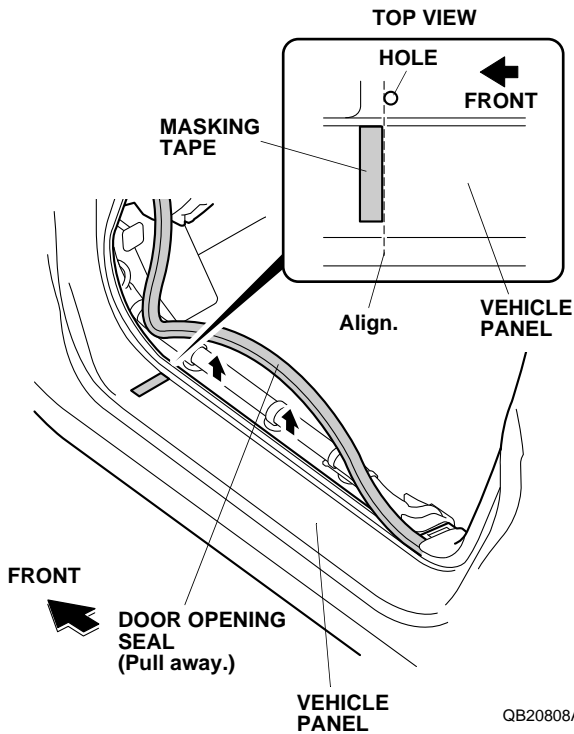

QB20808AB


- Attach a piece of masking tape to the vehicle panel in the location shown.

- Align the left front door sill trim with the masking tape attached in step 9, then attach another piece of masking tape to the vehicle panel along the outside of the left front door sill trim. Do not tape down the left front door sill trim.

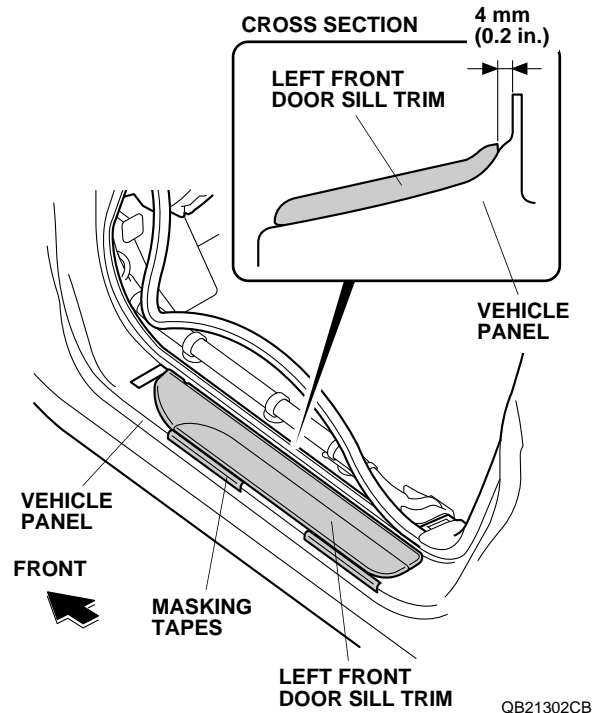


QB21302CB

- Remove the left front door sill trim.
- Peel back the adhesive backings, and tape them to the front surface of the left front door sill trim with masking tape.

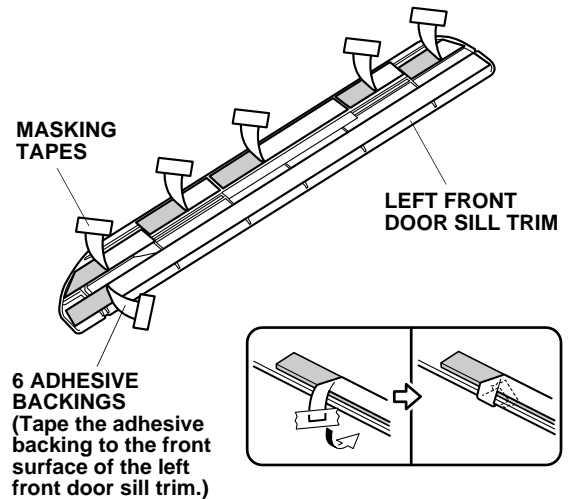


QB21303BB


- Using one alcohol swab, thoroughly clean the vehicle panel where the left front door sill trim will attach.

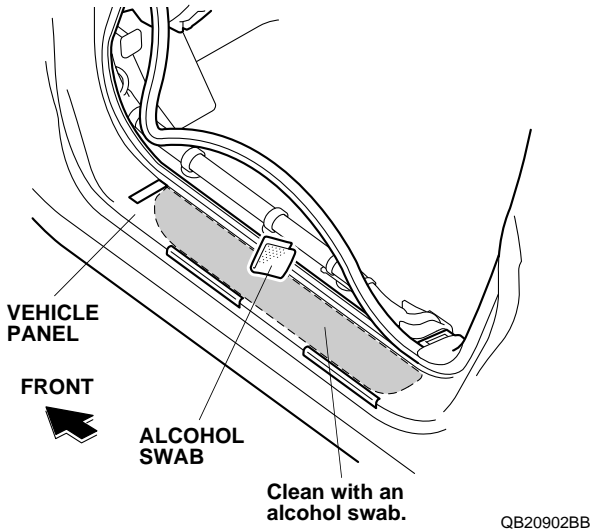


- Align the left front door sill trim with the masking tape and install the left front door sill trim to the vehicle panel.

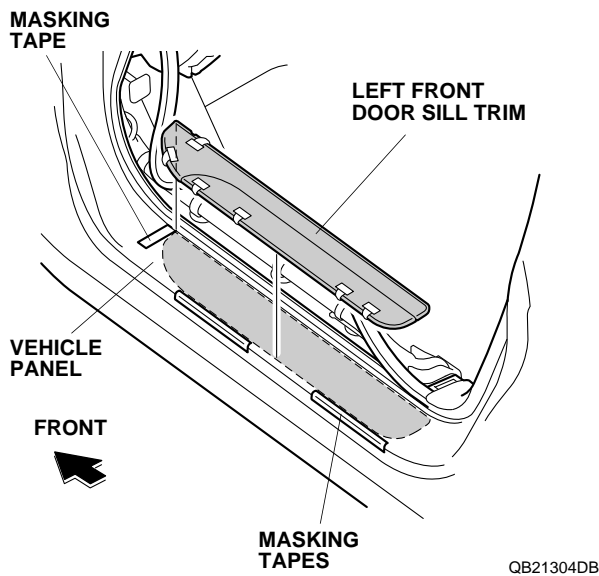

- While applying light pressure against the left front door sill trim, carefully remove the adhesive backings.

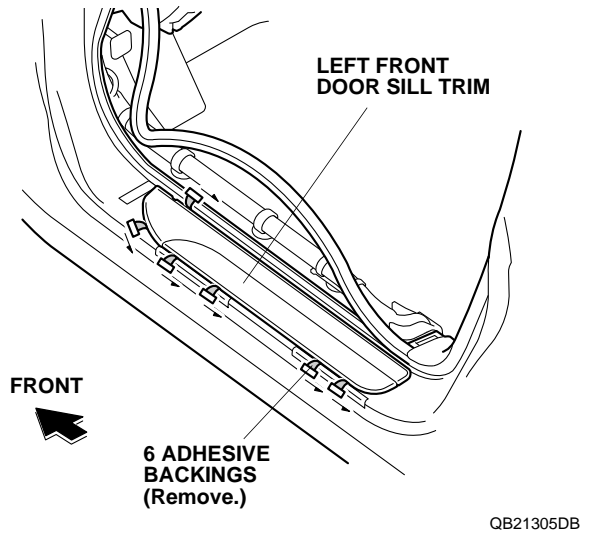


- Remove all of the masking tape.
- Repeat steps 8 through 16 to install the right front door sill trim on the right side of the vehicle.
- Pull away the door opening seal.

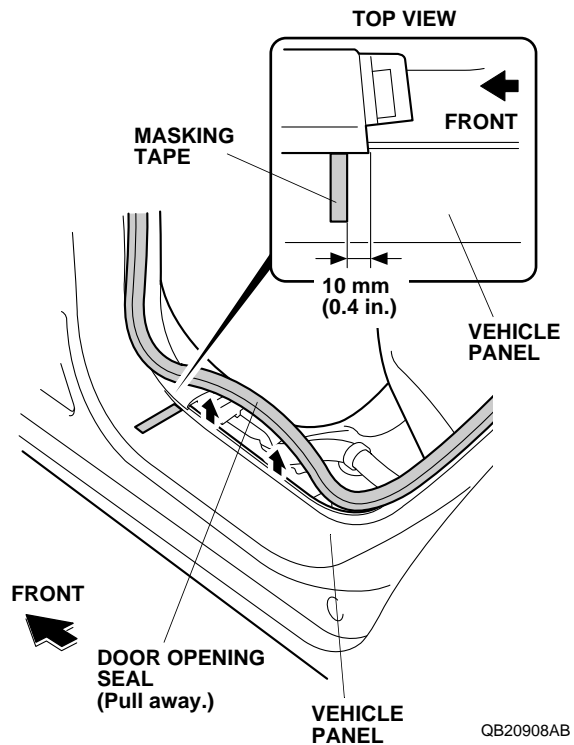


- Attach a piece of masking tape to the vehicle panel in the location shown.


- Align the left rear door sill trim with the masking tape attached in step 19, then attach another piece of masking tape to the vehicle panel along the outside of the left rear door sill trim. Do not tape down the left rear door sill trim.

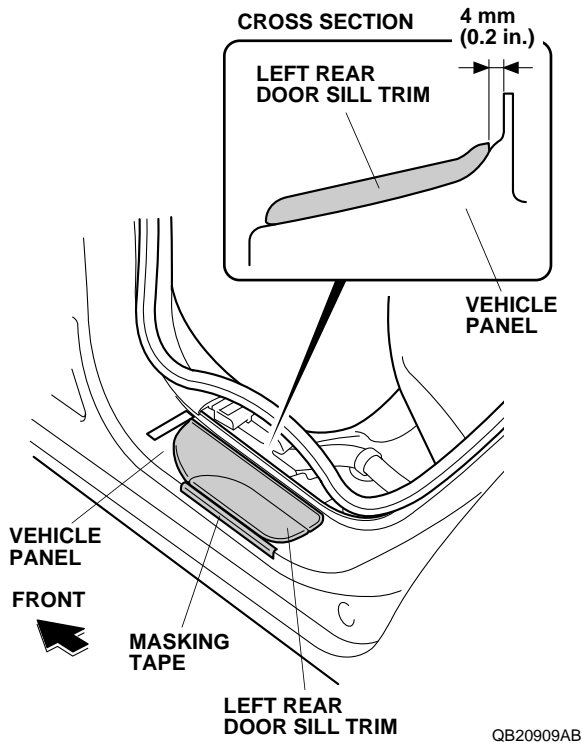


- Remove the left rear door sill trim.
- Peel back the adhesive backings, and tape them to the front surface of the left rear door sill trim with masking tape. Remove the small piece of adhesive backing.

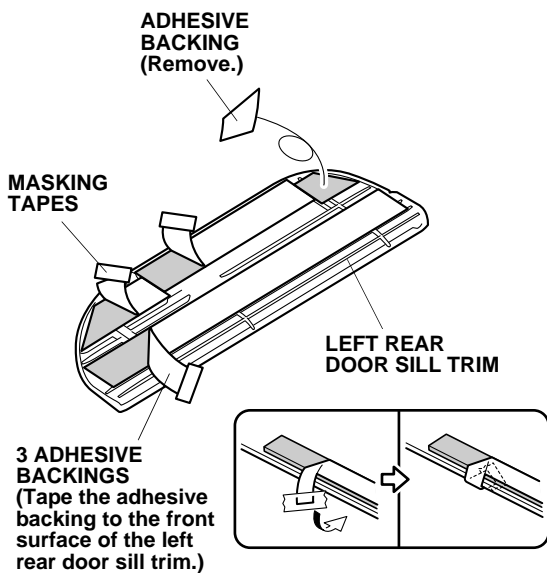


- Using one alcohol swab, thoroughly clean the vehicle panel where the left rear door sill trim will attach.

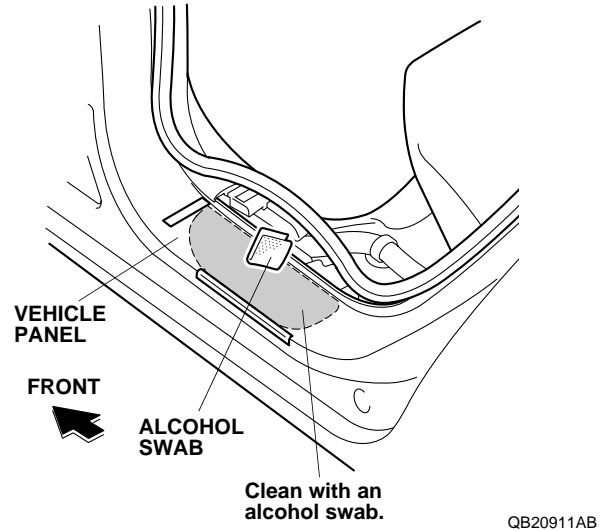

- Align the left rear door sill trim with the masking tape and install the left rear door sill trim to the vehicle panel.

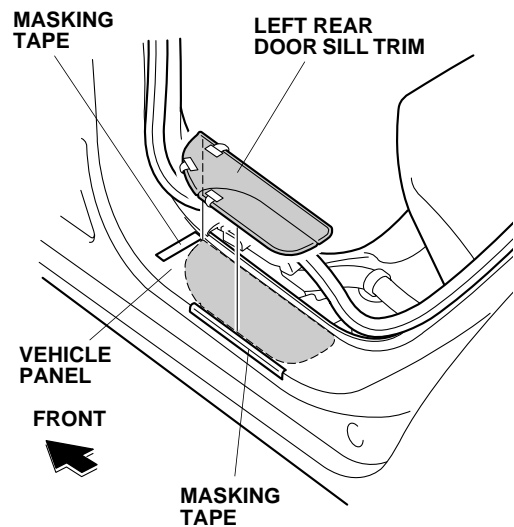

25. While applying light pressure against the left rear door sill trim, carefully remove the adhesive backings.

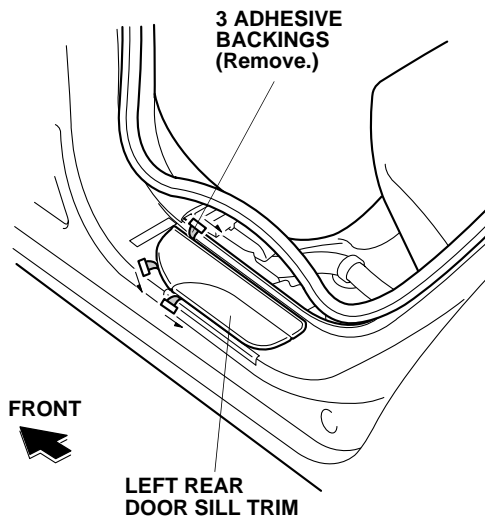

QB20913BB

26. Remove all of the masking tape.
27. Repeat steps 18 through 26 to install the right rear door sill trim on the right side of the vehicle.
28. Reinstall all removed parts.