
INSTALLATION	Accessory	Application 2014 CIVIC 2-DOOR	Publications No. All 50702
	DOOR EDGE GUARDS		Issue Date NOV 2013
PARTS LIST	INS	TALLATION	
Left door edge guard	ins teo tra vel	istomer Information: The in- itallation instruction is intende chnicians who have the prope ining to correctly and safely a hicle. These procedures shou p-it-yourselfers."	d for use only by skilled r tools, equipment, and add equipment to your
Right door edge guard	 NOTE: Door edge guards cannot be installed if the vehicle is already equipped with body side moldings. If your customer also wants body side moldings (sold separately), install them after you install the door edge guards. These instructions show the right door edge guard being installed. The same procedure applies to 		
Seam sealant cutting tool	in • E • C • C	nstalling the left door edge gu Be careful not to damage the Clean and wax the areas to be guality paste wax. dentify each door edge guard loor and matching its contour	uard. body paint finish. e covered with a high- l by holding it up to the
TOOLS AND SUPPLIES REQUIR Rubber mallet Felt-tip pen Touch-up paint Tape measure High-quality paste wax	ED		


Installing the Door Edge Guards

1. Gently place the right front door edge guard on the right front door in the position shown.

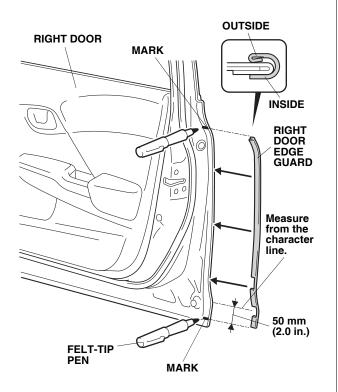


- 2. Using a felt-tip pen, mark the sealant at the top and bottom ending point of right door edge guard.
- 3. Remove the right door edge guard.


4. Position the cutting edge of the seam sealant cutting tool against the right door edge, and trim the seam sealant from mark to mark. The cutting tool cuts in only one direction.

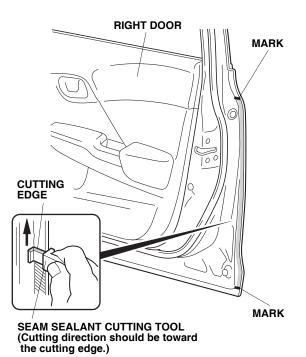

- 5. Apply touch-up paint to the cut seam sealant area, and let it dry.
- 6. Position the right door edge guard on the right door edge, and align it with the marks made in step 2.

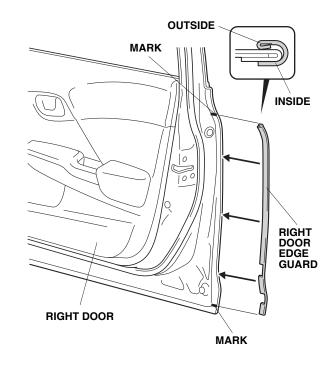

7. Starting at the character line, gently tap the right door edge guard into position with a series of light taps using a rubber mallet, then work up and down. Make sure the position of the right door edge guard is correct. Once in place, do not remove, reposition, or reinstall the right door edge guard or it will not hold securely.



8. Repeat steps 1 through 7 to install the left door edge guard on the left side of the vehicle.