



INSTALLATION INSTRUCTIONS


Accessory
**WOOD-GRAIN TRIM KIT,
FRONT CABIN
P/N 08Z03-S0X-100A**

Application
2004 ODYSSEY


Publications No.
All 26036
Issue Date
AUG 2003

PARTS LIST


Wood-grain instrument panel

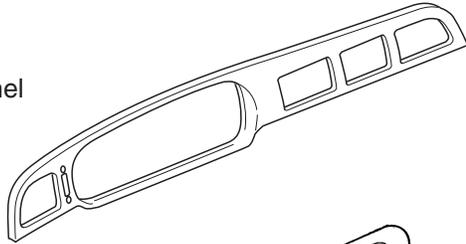

Wood-grain left door handle trim



Wood-grain right door handle trim



SUPPLIES REQUIRED

Isopropyl alcohol
Shop towel
Masking tape


INSTALLATION

NOTE: This wood panel kit should be installed only if the ambient air temperature is 60°F (15°C) or above.


Installing the Wood-Grain Instrument Panel

- Using isopropyl alcohol on a shop towel, thoroughly clean the areas where the three trim pieces will attach.

- Remove all inner adhesive tape backings from the wood-grain instrument panel. Peel one inch from the end of each adhesive backing on the outer adhesive tapes, and attach them to the front of the instrument panel with masking tape.

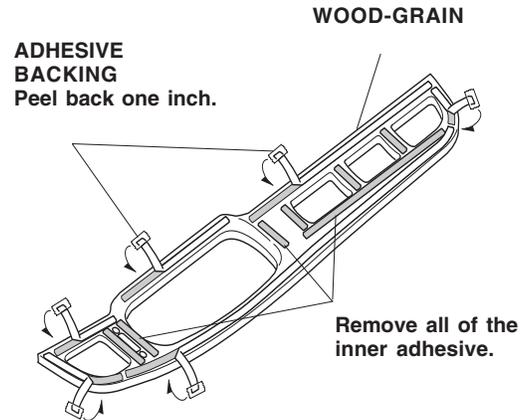


- Attach the wood-grain instrument panel to the vehicle instrument panel:
 - Position the wood-grain instrument panel on the vehicle instrument panel, and adjust its location. When you are satisfied that the instrument panel is positioned properly, hold light pressure against the center of the wood-grain instrument to hold it in position.

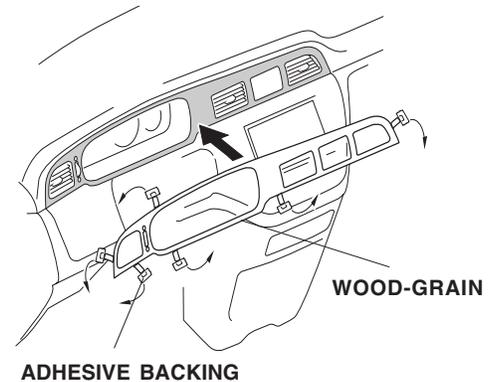

- While holding light pressure against the wood-grain instrument panel, slowly and carefully remove each piece of adhesive backing.
- Using the palm of your hand, firmly push the wood-grain instrument panel in several places where the adhesive tapes are attached. Apply pressure for about 30 seconds with the palm of your hand.

Installing the Wood-Grain Door Handle Trims

- Using isopropyl alcohol on a shop towel, thoroughly clean the mating surfaces on both door handle panels.
- Remove all adhesive tape backings from the left wood-grain instrument door handle trim. Position the left wood-grain door handle trim on the left (driver's) side door handle trim. When you are satisfied that the left wood-grain instrument door handle trim is positioned properly, attach it to the door handle trim.

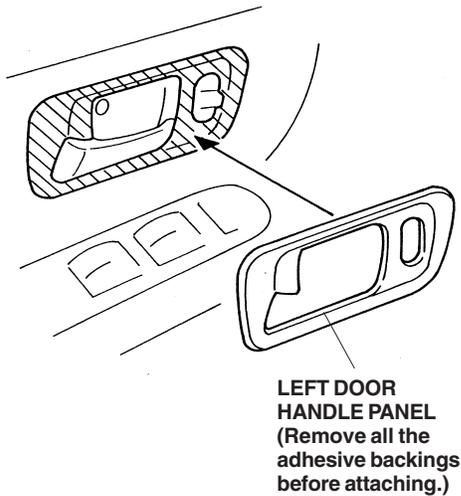

- Using the palm of your hand, firmly push the wood-grain door handle trim in several places where the adhesive tapes are attached. Apply pressure for about 30 seconds with the palm of your hand.
- Repeat steps 5 and 6 to install the right wood-grain door handle trim on the right (passenger's) side of the vehicle.