



INSTALLATION INSTRUCTIONS

Accessory

**HALF NOSE MASK
P/N 08P35-S5T-100A**

Application

2005 CIVIC Si

Publications No.


All 27949

Issue Date


AUG 2004

PARTS LIST


Mask
(hood section)

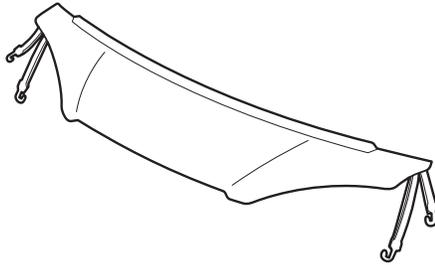

Left side mask
(fender section)



Right side mask
(fender section)



2 Snap-screws



2 Fenderwell nuts



2 Washers



TOOLS REQUIRED

Stubby Phillips screwdriver

Flat-tip screwdriver


INSTALLATION

NOTE:

- Make sure the vehicle and the nose mask are clean and completely dry before installation. If moisture under the mask is allowed to dry, it may cloud the paint. If the mask gets wet, remove it and allow it to air-dry completely.
- Make sure any repainted surfaces are cured.
- Make sure the hood and nose of the vehicle have been waxed with a high-quality paste wax.
- Make sure you install the nose mask securely. If the nose mask starts to flap or comes loose while driving, safely pull off the highway, stop the vehicle, and secure or remove the mask.

Installing the Hood Section


1. Open the hood. Fit the corners of the mask around the hood. Adjust the mask so that it fits smoothly over the edges. Attach the center hook to the hood.

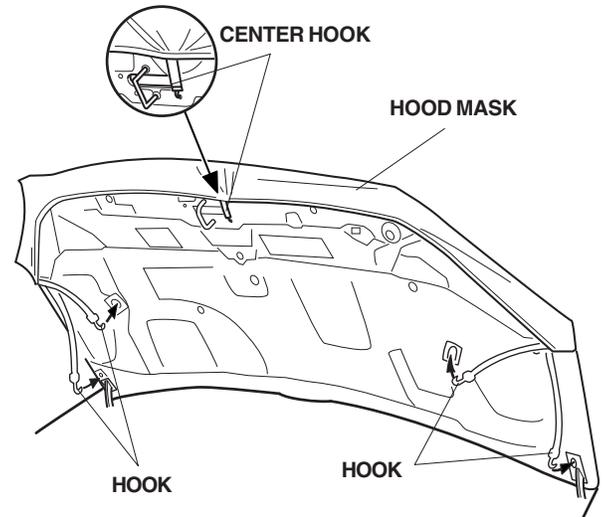

2. Secure the mask by hooking the four hooks to the holes in the back of the hood.


Installing the Fender Section

3. Turn the steering wheel all the way clockwise.
4. Pry out the plastic pin, and remove the expansion clip that fastens the inner fender; remove and retain the clip, then clean the area around the hole.

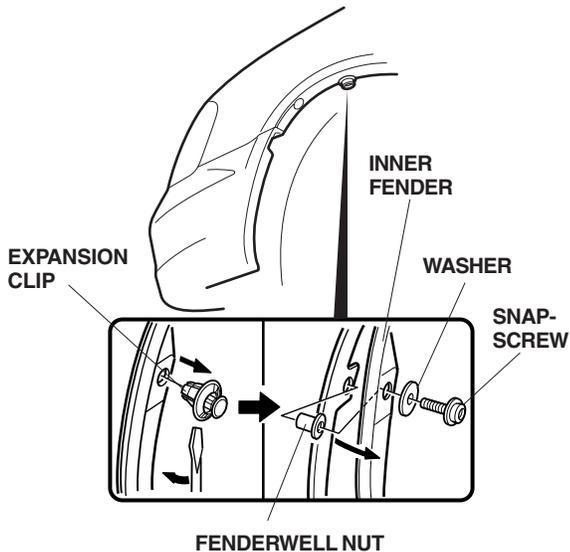

5. Pull the inner fender away, and press one fenderwell nut (supplied) into the hole in the fender flange.
6. With its washer in place, securely tighten one snap-screw into the fenderwell nut.
7. Turn the steering wheel all the way counter-clockwise, and repeat steps 4 through 6 on the other side of the vehicle.

8. Starting along the bottom of the headlight, slide the tab up between the headlight and the fender, then slide the plastic tab into the opening at the front corner of the fender. Make sure the lip on the plastic tab catches the lip of the inner fender.

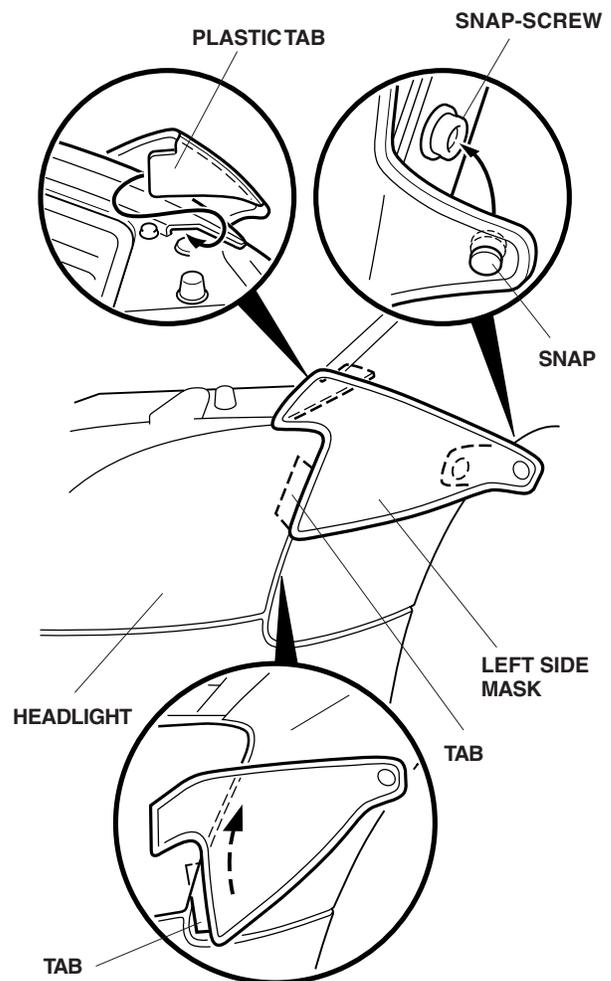

9. Pull the mask toward the wheelwell, smooth out any wrinkles, and snap the mask onto the snap-screw.
10. Repeat steps 8 and 9 to install the right side mask on the right side of the vehicle.
11. Put these instructions and the expansion clips removed in step 4 in the glove box.

CLEANING THE NOSE MASK

Use a sponge or cloth and a solution of mild liquid dishwashing soap and water to clean the vinyl and the flannel backing. Rinse the mask completely with clean water, and hang it to dry out of direct sunlight. Make sure the mask is completely dry before you reinstall it.