

- (H) <b>HONDA</b> - INSTALLATION	Accessory	Application 2009 FIT	Publications No. All 39829 Issue Date AUG 2008
INSTRUCTIONS	STEERING WHEEL COVER		
PARTS LIST Steering wheel cover	2.	Put the steering wheel cov so the adhesive tapes on the wheel cover set at each spe	he inside of the steerin
		3 ADHESIVE TAPES Position at each spoke.	STEERING WHEEL Clean using isopropyl alcohol.
Needle			SPOKE
Lacing string	SF SF	POKE	STEERING
TOOLS AND SUPPLIES REQUIRED	)		COVER
Shop towel Gloves Masking tape Isopropyl alcohol Scissors	3. 4.	Locate the positions where attach, and clean the steer alcohol. Peel back the adhesive ba	ing wheel with isopropy
INSTALLATION			
<ul> <li>NOTE</li> <li>Using isopropyl alcohol, thoroughly wheel before installing the wheel c</li> <li>You may want to wear gloves to pr during installation.</li> <li>Center the steering wheel.</li> </ul>	over.		3 ADHESIVE BACKINGS Peel back.

1. Center the steering wheel.


5. Thread a needle. Make inclined stitches in the steering wheel cover up to the hole that is right above the spoke as shown. Stick the needle into the steering wheel cover at the point marked below, and start stitching.

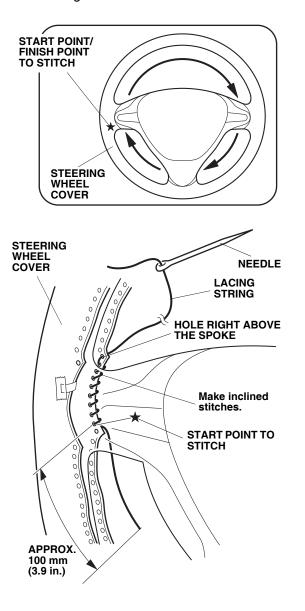


6. Stitch twice at the hole right above the spoke, and pull the lacing string to close the seam securely. Pull the lacing string securely to bring both ends of the steering wheel cover together very closely.




- 7. Keep stitching the steering wheel cover so the stitches show the inclined line pattern (right side up).
  - Pull the lacing string and close the seam securely at each stitch.
  - Keep stitching the steering wheel cover so the seam shows the center line on the inside of the steering wheel.



- 8. Keep stitching while adjusting the steering wheel cover so the joints of both ends of the cover are aligned.
- 9. Stitch the spoke area of the steering wheel cover as shown. Stitch twice at the holes in the steering wheel cover that are right below and right above the spoke.




Align the joints.

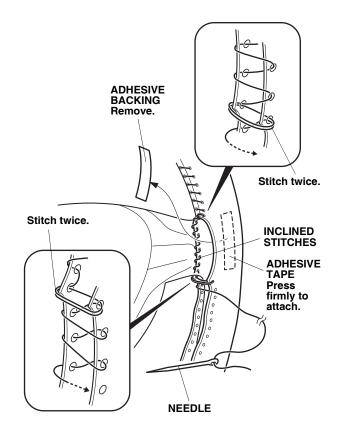

- 10. Remove the adhesive backings on the spoke, and press the adhesive tapes firmly to attach.
- 11. Stitch the lower part of the steering wheel cover in the same manner.

12. After stitching the steering wheel cover while removing the adhesive backings, pull the finishing end of the lacing string out of the joint of the steering wheel cover. Be sure that both the starting end and finishing end of the lacing strings are out of the joint of the steering wheel cover.



- 13. Make a knot twice in the end of the lacing strings, and cut off the excess.
- 14. Put the knots inside the steering wheel cover.
- 15. Remove the adhesive backings on the spoke, and press the adhesive tapes firmly to attach.