



4. Place the left front splash guard on the left inner fender as shown.

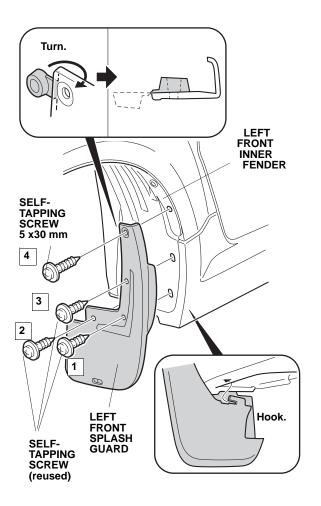


- 5. Install the left front splash guard with one 5 x 30 mm self-tapping screw, and three self-tapping screws removed in step 3. Do not tighten the self-tapping screws yet.
- 6. While holding the left front splash guard against the left front inner fender, tighten the self-tapping screws in the order shown.
- 7. Turn the steering wheel all the way clockwise, and repeat steps 3 through 6 to install the right front splash guard.

Installing The Rear Splash Guards

8. Using a self-tapping screw, pierce the two dimples in the rear bumper, then install two clip nuts over the holes.



- 9. Press one screw grommet into the hole in the fenderwell.
- 10. Install the left rear splash guard on the rear bumper with three 5 x 20 mm self-tapping screws. Do not tighten the self-tapping screws yet.



- 11. While holding the left rear splash guard against the left rear bumper, tighten the self-tapping screws in the order shown.
- 12. Repeat steps 8 through 11 to install the right rear splash guard.