INSTALLATION	Accessory STEERING WHEEL COVER	Application 2011 FIT	Publications No. All 45122 Issue Date NOV 2010
PARTS LIST Steering wheel cover	2.	so the adhesive tapes on	over on the steering wheel the inside of the steering poke of the steering whee
		3 ADHESIVE TAPES Position at each spoke.	STEERING WHEEL Clean using isopropyl alcohol.
Needle			SPOKE
Lacing string	SF	РОКЕ	STEERING
TOOLS AND SUPPLIES REQUIRE	D		COVER
Shop towel Gloves Masking tape Isopropyl alcohol Scissors INSTALLATION	3. 4.	attach, and clean the ster alcohol. Peel back the adhesive b pieces of masking tape to	
NOTE			
Using isopropyl alcohol, thorough	ly clean the steering		

3 ADHESIVE BACKINGS Peel back.

wheel before installing the wheel cover.


Center the steering wheel.

during installation.


1.

• You may want to wear gloves to protect your hands


5. Thread the needle. Make inclined stitches in the steering wheel cover up to the hole that is right above the spoke as shown. Insert the needle into the hole in the steering wheel cover at the point marked below, and start stitching.

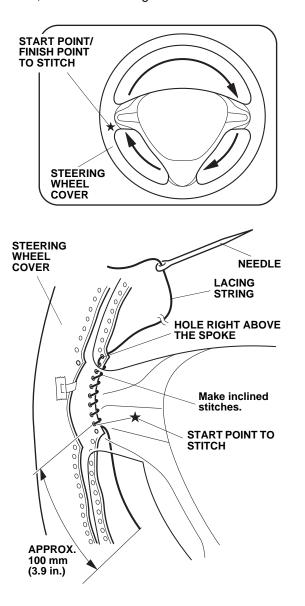


6. Stitch twice through the holes right above the spoke, and pull the lacing string to close the seam securely.




- 7. Keep stitching the steering wheel cover so the stitches show the inclined line pattern (right side up).
 - Pull the lacing string and close the seam securely at each stitch.
 - Keep stitching the steering wheel cover so the seam follows the center line on the inside of the steering wheel.



8. Keep stitching while adjusting the steering wheel cover so the joints on the cover are aligned.




9. Stitch the spoke area of the steering wheel cover as shown. Stitch twice at the holes in the steering wheel cover that are right below and right above the spoke.

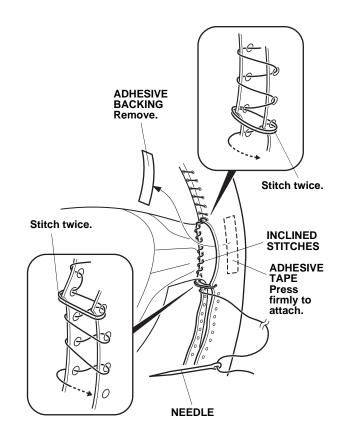

- 10. Remove the adhesive backings on the spoke, and press the adhesive tapes firmly to attach.
- 11. Stitch the lower part of the steering wheel cover in the same manner.

12. After stitching the steering wheel cover while removing the adhesive backings, pull the finishing end of the lacing string out of the joint of the steering wheel cover. Be sure that both the starting end and finishing end of the lacing strings are out of the joint of the steering wheel cover.



- 13. Make a knot twice in the lacing strings, and cut off the excess.
- 14. Put the knots inside the steering wheel cover.
- 15. Remove the adhesive backings on the spoke, and press the adhesive tapes firmly to attach.