



1. Push the knobs and remove each headrest from the second row seats.

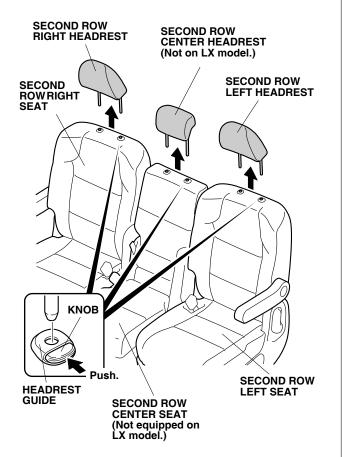


2. Install a second row headrest cover to each headrest.

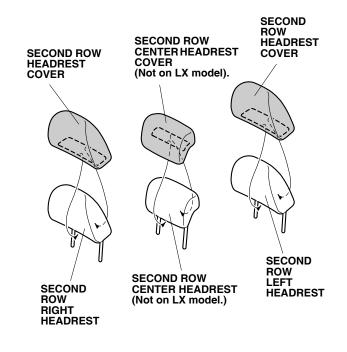


Install the second row left seat cover to the second row left seat in the order 1→2→3→4.
 NOTE: Make sure that the headrest guide on the second row left seat is not covered by the second row left seat cover.


SECOND ROW LEFT SEAT COVER

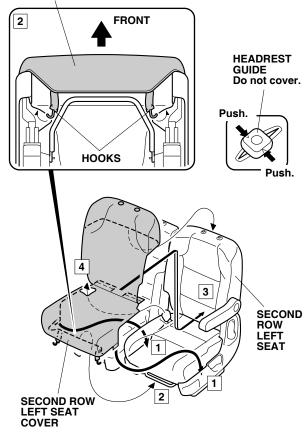

4. Fold the second row left seat foward halfway.




- 5. Secure the second row left seat cover to the second row left seat cushion with the two hook-and-loop fasteners.
- 6. Return the second row left seat to its standard postion.




- 7. Install a second row seat armrest cover to the second row left seat armrest. On the LX model, install this cover to the inboard armrest.
- 8. Repeat steps 3 thru 7 to install the second row seat cover on the second row right seat.

If the vehicle is you are working on is an LX model, go to step 15. If not, continue with step 9.

- 9. Install the second row center seat back cover to the
 - second row center seat back in the order $1 \rightarrow 2$. NOTE: Make sure that headrest guide on the second row center seat back is not covered by the second row center seat back cover.




10. Fold the second row center seat foward.




11. Secure two hook-and-loop fasteners on the second row center seat back cover as shown.

12. Return the second row center seat to the up position.

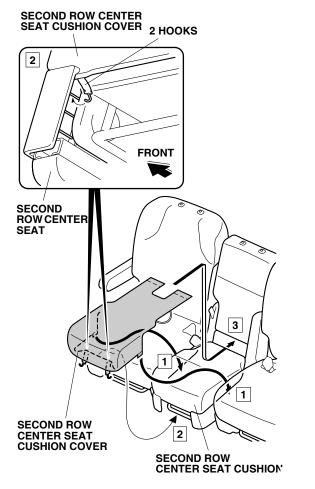

13. Install the second row center seat cushion cover to the second row center seat in the order
1→2→3.

14. Secure the second row center seat cushion cover to the second row center seat with the two hook-and-loop fasteners.



15. Install the headrests.