
HONDA
INSTALLATION
INSTRUCTIONS

Accessory STEERING WHEEL COVER	Application	Publications No. All 46024
	2012 FIT	Issue Date
		AUG 2011

PARTS LIST

Steering wheel cover



Needle



Lacing string



TOOLS AND SUPPLIES REQUIRED


Shop towel Gloves Masking tape Isopropyl alcohol Scissors

INSTALLATION


NOTE

- Using isopropyl alcohol, thoroughly clean the steering wheel before installing the wheel cover.
- You may want to wear gloves to protect your hands during installation.


- 1. Center the steering wheel.
- 2. Put the steering wheel cover on the steering wheel so the adhesive tapes on the inside of the steering wheel cover set at each spoke of the steering wheel.

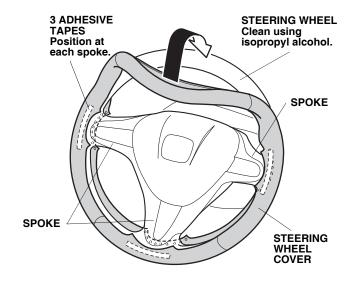


- Locate the positions where the adhesive tapes will attach, and clean the steering wheel with isopropyl alcohol.
- 4. Peel back the adhesive backings partway. Use pieces of masking tape to tape the ends of the adhesive backings to the outer surface of the cover.

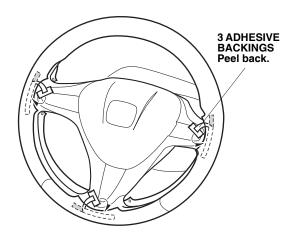


 Thread the needle. Make inclined stitches in the steering wheel cover up to the hole that is right above the spoke as shown. Insert the needle into the hole in the steering wheel cover at the point marked below, and start stitching.




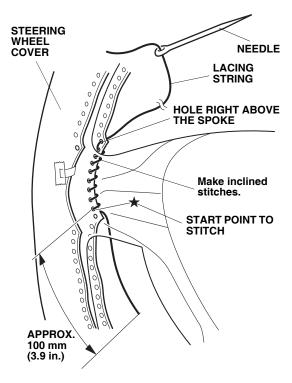


6. Stitch twice through the holes right above the spoke, and pull the lacing string to close the seam securely.




- 7. Keep stitching the steering wheel cover so the stitches show the inclined line pattern (right side up).
 - Pull the lacing string and close the seam securely at each stitch.
 - Keep stitching the steering wheel cover so the seam follows the center line on the inside of the steering wheel.

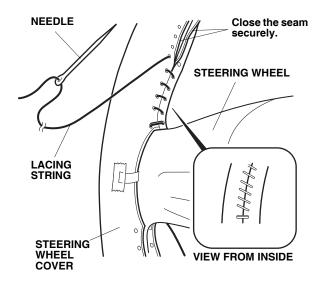

8. Keep stitching while adjusting the steering wheel cover so the joints on the cover are aligned.

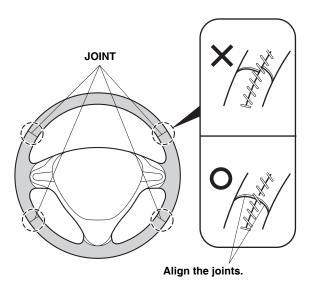


9. Stitch the spoke area of the steering wheel cover as shown. Stitch twice at the holes in the steering wheel cover that are right below and right above the spoke.

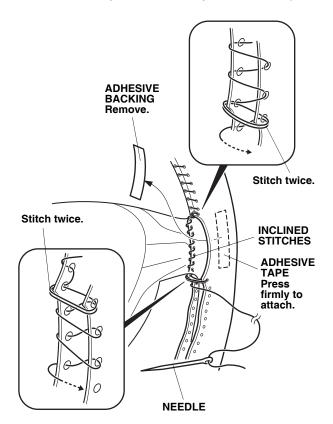

- 10. Remove the adhesive backings on the spoke, and press the adhesive tapes firmly to attach.
- 11. Stitch the lower part of the steering wheel cover in the same manner.

12. After stitching the steering wheel cover while removing the adhesive backings, pull the finishing end of the lacing string out of the joint of the steering wheel cover. Be sure that both the starting end and finishing end of the lacing strings are out of the joint of the steering wheel cover.



- 13. Make a knot twice in the lacing strings, and cut off the excess.
- 14. Put the knots inside the steering wheel cover.
- 15. Remove the adhesive backings on the spoke, and press the adhesive tapes firmly to attach.